


# Rol-Air


## 1½ HP SINGLE STAGE TWO CYLINDER PORTABLE ELECTRIC COMPRESSORS

ASSOCIATE  
ENGINEERING  
CORPORATION

606 S. LAKE STREET, P.O. BOX 346  
HUSTISFORD, WISCONSIN 53034-0346  
PHONE: 920-349-3281  
SALES FAX: 920.349.3691  
SERVICE FAX: 920.349.8861  
www.rolair.net

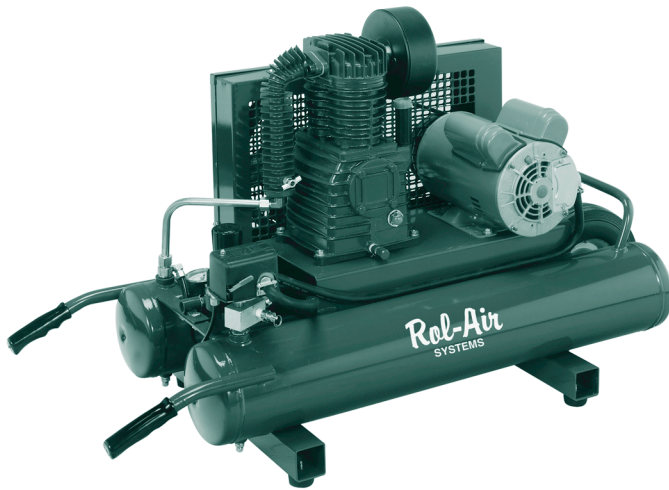

MODEL 5715K17

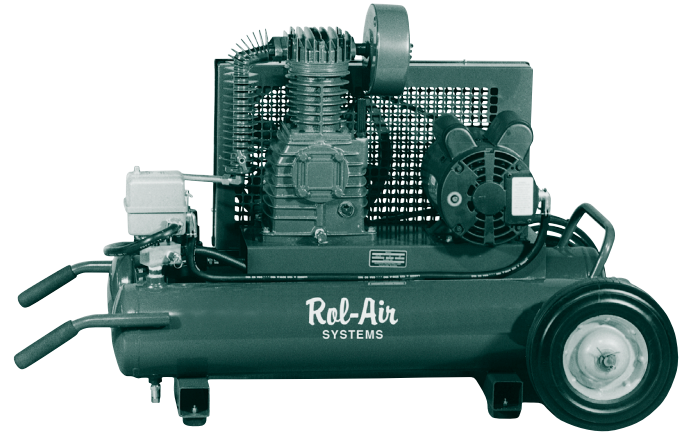

MODEL 6715K17

### “ROL-AIR” STANDARD FEATURES

**PUMP:** Heavy-Duty, Single Stage, Cast-Iron Twin Cylinders, Ball Bearings, Splash Lubricated, Hardened Steel Valve Plates with Swedish Lamellar Reed Valves and Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11” Flywheel, Oil Sight Gauge

**MOTOR:** 1½ HP 1725 RPM Open Drip Proof  
115/230 - 60 HZ Ball Bearings  
Overload Protection w/Manual Reset

**TANK ASSEMBLY:** Non-Code, 9 Gallons

**WHEELS:** Model 5715K17 - One 410/350 x 4 Flat Free Tire  
Model 6715K17 - Two 410/350 x 4 Flat Free Tire

### PERFORMANCE @ 100 PSI:

Cu. Ft. Displaced - 10.1  
Cu. Ft. Free Air - 6.9

### DIMENSIONS:

Model 5715K17 - L46” X W19” X H28”  
Model 6715K17 - L46” X W27” X H28”

### SHIPPING WEIGHT:

Model 5715K17 - 180 lbs.  
Model 6715K17 - 190 lbs.

### STANDARD EQUIPMENT

- Industrial “Square D” Pressure Switch w/ Unloader
- Intake Filter w/Silencer & Replaceable Element
- Totally Enclosed Steel Belt Guard
- 12-3 Cord w/Dead Front Plug
- Pressure Gauge; 0-200 in 5 lb. Graduations
- On/Off Lever
- Air-Cooled Aftercooler
- Accessory Support Clip
- Quick Disconnect Fitting
- Safety Relief Valve

### OPTIONAL EQUIPMENT

Constant Speed Operation, Dual Control Operation,  
Dual Voltage Switch, Filter-Regulator-Lubricator Sets,  
Fully-Pneumatic Wheels.



# Rol-Air

## 1½ HP SINGLE STAGE TWO CYLINDER PORTABLE ELECTRIC COMPRESSOR

ASSOCIATE  
ENGINEERING  
CORPORATION

606 S. LAKE STREET, P.O. BOX 346  
HUSTISFORD, WISCONSIN 53034-0346  
PHONE: 920-349-3281  
SALES FAX: 920.349.3691  
SERVICE FAX: 920.349.8861  
www.rolair.net



MODEL 5520K17

### “ROL-AIR” STANDARD FEATURES

**PUMP:** Heavy-Duty, Single Stage, Cast-Iron Twin Cylinders, Ball Bearings, Splash Lubricated, Hardened Steel Valve Plates with Swedish Lamellar Reed Valves and Aluminum Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11” Flywheel, Oil Sight Gauge

**MOTOR:** 1½ HP 1725 RPM Open Drip Proof  
115/230 - 60 HZ Ball Bearings  
Overload Protection w/Manual Reset

**TANK ASSEMBLY:** Non-Code, 20 Gallons

**WHEELS:** Two 410/350 x 4 Flat Free Tire

### PERFORMANCE @ 100 PSI:

Cu. Ft. Displaced - 10.1  
Cu. Ft. Free Air - 6.9

### DIMENSIONS:

L42” X W22” X H34”

### SHIPPING WEIGHT:

200 lbs.

### STANDARD EQUIPMENT

- Industrial “Square D” Pressure Switch w/ Unloader
- Intake Filter w/Silencer & Replaceable Element
- Totally Enclosed Steel Belt Guard
- Pressure Gauge; 0-200 in 5 lb. Graduations
- On/Off Lever
- 12-3 Cord w/Dead Front Plug
- Accessory Support Clip
- Quick Disconnect Fitting
- Safety Relief Valve

### OPTIONAL EQUIPMENT

Constant Speed Operation, Dual Control Operation,  
Dual Voltage Switch, Filter-Regulator-Lubricator Sets,  
ASME Tank, Fully-Pneumatic Wheels.

