



# NEW CC1800XL SERIES CONCRETE SAW

## Large Saw Features in a Portable Saw

New sturdier handles

Lift bar standard

Available with push or hydrostatic transmission choices

Variety of power options in gasoline, electric or hydraulic up to 20 HP

Self aligning blade shaft bearings

Left or right hand sawing


7-5/8" cutting depth with 20" guard

Available with choice of 14" or 20" blade guard

Improved battery access

Water valve can be mounted on left or right side


Available with a 7.5 or 10 HP electric motor

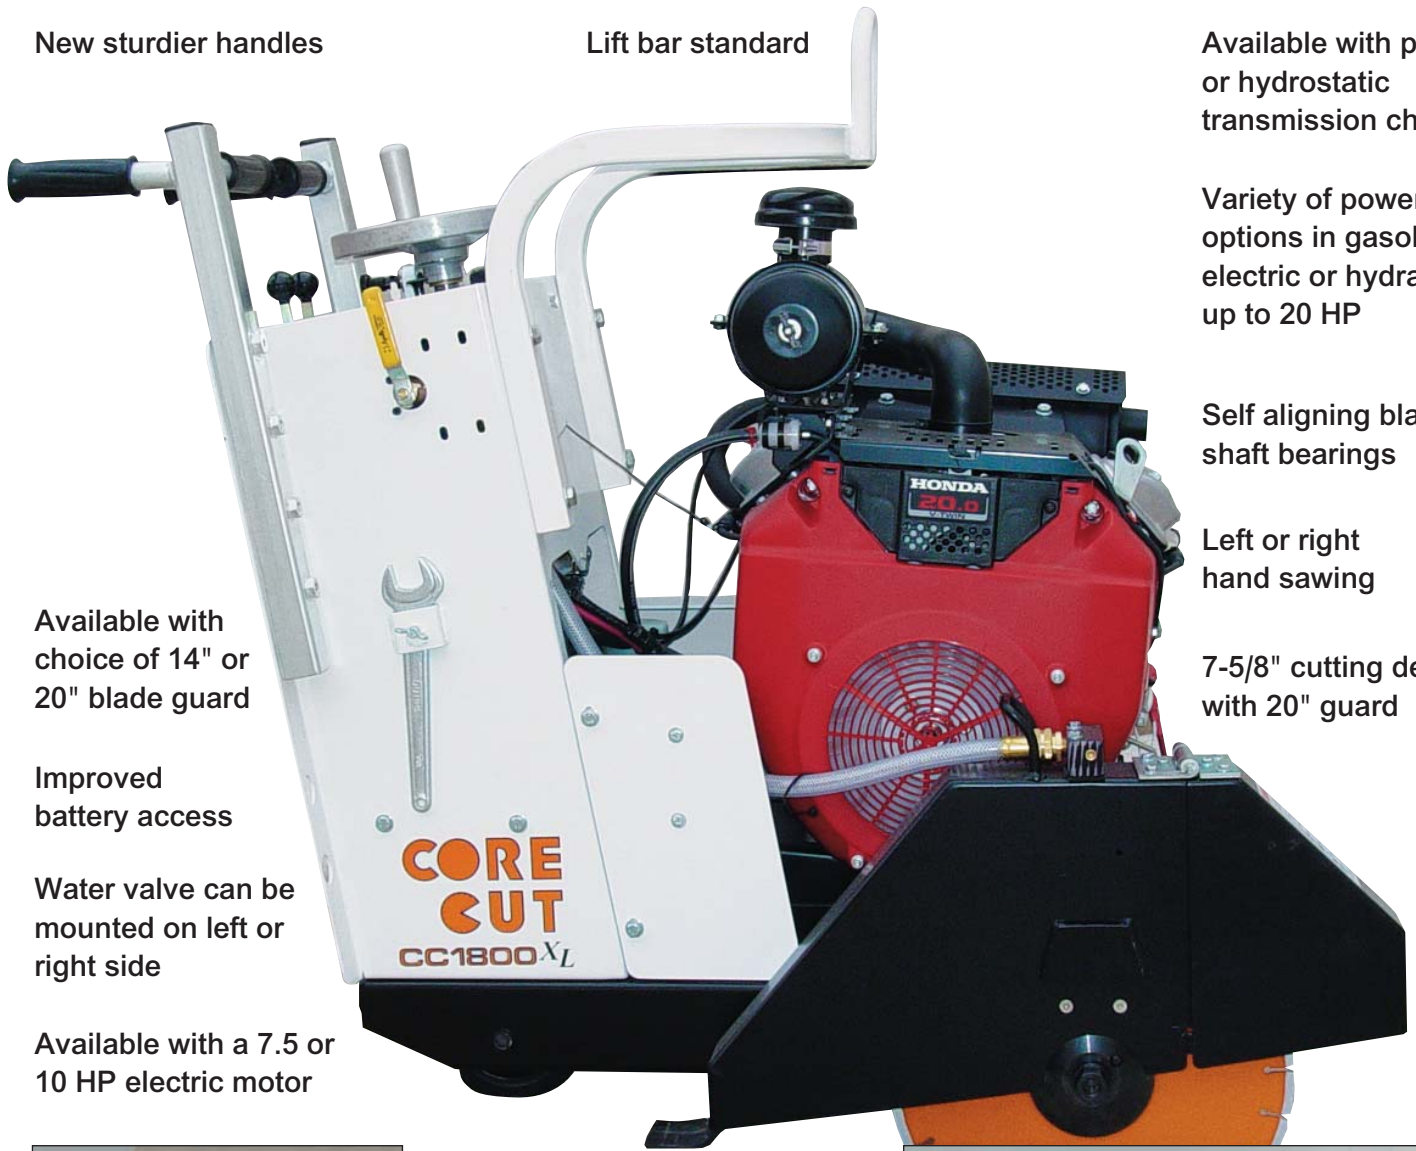

Handles may be mounted pointing in (shown) or out



# CC1800XL SPECIFICATIONS

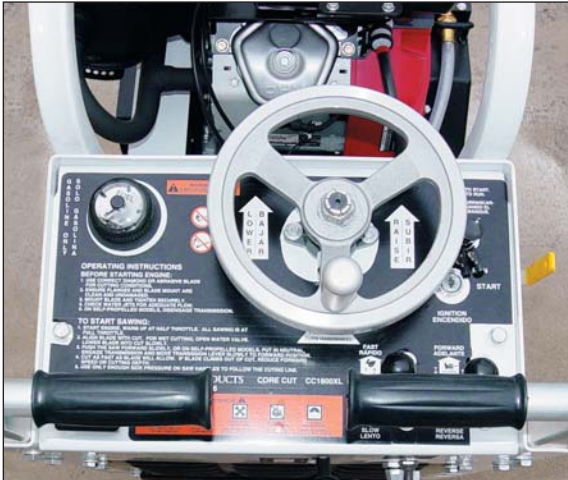

CC1800XL Control Panel  
(remote throttle, choke and ignition switch are only available on 20 HP models)

CC1800XL Specifications	
Maximum Depth of Cut With 14" Blade:	4-5/8"
Maximum Depth of Cut With 20" Blade:	7-5/8"
Blade Shaft RPM:	2600
Blade Shaft Diameter:	1-1/4"
Arbor Diameter:	1" with single drive pin
Blade Shaft Drive:	3 belt through 13 HP, 4 belt 16 HP and up
Blade Mounting:	Right or left
Blade Raise and Lower:	Precision screw feed
Front Wheel Dimensions:	5" x 2" x 1/2"
Rear Wheel Dimensions:	6" x 1-1/2" x 5/8"
Handle Bars:	Adjustable height and reversible
Transmission:	Eaton Model 6 or push
Drive Speed:	0-80 feet per minute
Fuel Capacity:	2 gallons
Electric Start:	Standard on 20 HP models
Low Oil Alert:	Standard
Tach/Hour Meter:	Standard on 20 HP models

CC1800XL PUSH Saws						
Model No.	Engine Type	P/N - 14" Model	Cat. No. - 14"	P/N - 20" Model	Cat. No. - 20"	Uncrated Wt.**
CC1875E1-P	7.5 HP Baldor - 1 PH - 230V Electric	5800628	54480	5800629	54490	330 lbs.
CC1810E3-P	10 HP Baldor - 3 PH Electric *	5800692	54485	5800693	54497	330
CC1813H-P	13 HP Honda	5800694	54486	5800695	54498	280
CC1816BV-P	16 HP Briggs Vanguard	5800696	54487	5800697	54505	310
CC1818HY-P	18 HP Danfoss Hydraulic +	5800698	54489	5800699	54506	300

\* Available as or 230, 460 or 575 Volt.

\*\* Add 40 lbs. for crated weight.

+ Specify available input flow (GPM). 25 GPM @2000 PSI maximum.

CC1800XL SELF-PROPELLED Saws						
Model No.	Engine Type	P/N - 14" Model	Cat. No. - 14"	P/N - 20" Model	Cat. No. - 20"	Uncrated Wt.**
CC1875E1-S	7.5 HP Baldor - 1 PH - 230V Electric	5800736	54507	5800737	54539	380 lbs.
CC1810E3-S	10 HP Baldor - 3 PH Electric *	5800738	54508	5800739	54540	380
CC1813H-S	13 HP Honda	5800643	54536	5800644	54541	330
CC1816BV-S	16 HP Briggs Vanguard	5800645	54537	5800646	54542	360
CC1818HY-S	18 HP Danfoss Hydraulic +	5800647	54538	5800648	54549	350
CC1820H-S	20 HP Honda † v	5800667	51234	5800668	53351	415

\* Available as or 230, 460 or 575 Volt.

\*\* Add 40 lbs. for crated weight.

† Electric start + Specify available input flow (GPM) 25 GPM @2500 PSI maximum.

◆ Includes remote cyclone air cleaner

CC1800XL Options		
Description	P/N	Cat. No.
Electric Water Pump (Electric start only)	6048070	-
Water Tank Kit * (5 gallon)	6048969	-
Tach/Hour Meter † (displays engine RPM)	2800120	47934
Weight Kit ** (26 pounds)	6048959	-
Parking Brake	6048873	-
Extra Blade Guard 14" (Slip-On Style)	6048912	97088
Extra Blade Guard 20" (Slip-On Style)	6048904	98682
Extra Blade Guard 14" (Bolt-On Style)	6048010	47056
Extra Blade Guard 20" (Bolt-On Style)	6048074	47272
Catalytic Muffler for 13 HP Honda	2501567	78637
Catalytic Muffler for 20 HP Honda	2501566	77694
Extended Blade Shaft Kit for up to 1" spacing	6048107	48388

\* For dust suppression when dry cutting only.  
(Not available on electric saw models).

† Standard on all 20 HP model saws.

\*\* Standard on all saws with 20" blade capacity and all saws over 15 HP.

CC1800XL Dimensions	
Saw Ht. with Handlebar max up.	42"
Max Length Pointer Up	36"
Max Length Pointer Down	72"
Saw Ht. w/o Handle or lift bar	36"
Frame Width	16"
Frame Length	30-5/8"
Saw Width	22-3/8"
Front Axle Center Length	10-5/8"
Rear Axle Center Length	12"
Wheel Base Length	15-3/8"
Blade Shaft Max Height	13"



(800)  
321-5336