

DYNAPAC



LP750

Vibratory Double Drum Roller



Technical data

Dimensions: mm

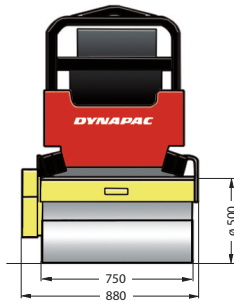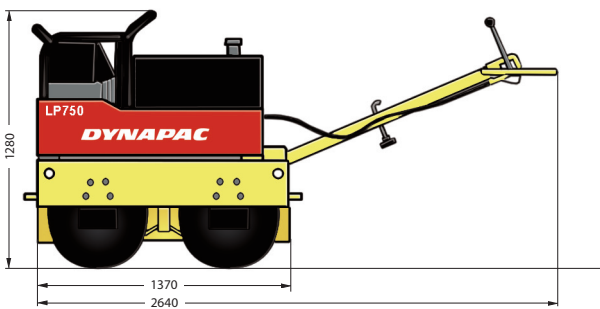


Weight	Electrical start	Manual start
Net weight, kg	979	953
Operating weight, kg	1009	983

Engine	Electrical start	Manual start
Manufacturer	Hatz Supra	Hatz Supra
Type	1D81S	1D81S
Starting system	Electrical start	Manual start
Fuel	Diesel	Diesel
Output kW/rpm	8.9/2900	8.9/2900

Compaction	Electrical start	Manual start
Static linear load, kg/cm	6.3	6.3
Speed m/min	0-60	0-60
Gradeability, %	35	35
Drive system	Hydraulic/Mechanical	Hydraulic/Mechanical
Frequency, Hz	63	63
Amplitude, mm	0.5	0.5
Centrifugal force, kN	25	25
Vibratory system	Hydraulic	Hydraulic

Sprinkler system	Electrical start	Manual start
Tank capacity, l	2*28	2*28
Type of sprinkling	Gravity	Gravity

Compaction data

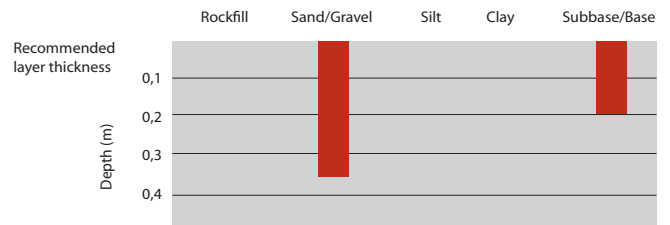

Source: Dynapac Int. High Comp Centre

Dynapac Compaction Equipment AB, Box 504, SE-371 23 Karlskrona, Sweden, Tel: +46 455 30 60 00, Fax: +46 455 30 60 30

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, is not guaranteed and contains no warranties of any kind.

www.dynapac.com